



Anderson Dam Seismic Retrofit Project

About the Project

Valley Water (the Santa Clara Valley Water District) plans to retrofit and strengthen Anderson Dam in Morgan Hill so it can safely withstand a large earthquake. Known as the Anderson Dam Seismic Retrofit Project, this effort will ensure public safety and secure a reliable water supply.

Why this project?

A large earthquake on the Calaveras Fault or the Coyote Creek Fault could result in significant damage to Anderson Dam, possibly leading to dam failure and uncontrolled water release that could inundate cities and rural areas from San Francisco Bay south to Monterey Bay, including much of Silicon Valley. Additionally, earthquakes could cause faults running under the dam to damage the existing outlet pipe used to release water from the reservoir.

YOUR TAX DOLLARS AT WORK



Valley Water

**Safe,
Clean
Water**

and Natural Flood Protection



Safe, Clean Water
and Natural Flood Protection

PRIORITY C

PRIORITY C Protect our water supply and dams from earthquakes and other natural disasters

The Seismic Retrofit Project

Valley Water initiated the Anderson Dam Seismic Retrofit Project (ADSRP) in 2012 following a seismic stability evaluation. During the design phase, additional studies revealed previously unidentified fault lines, extending the length of time to complete the project. Valley Water is working closely with the Federal Energy Regulatory Commission (FERC) and the State Division of Safety of Dams (DSOD) to modernize the dam.

In 2020, Valley Water merged the project with the restoration measures for the Coyote Creek Watershed under the Fish and Aquatic Habitat Collaborative Effort (FAHCE) to best promote a healthy fish population below Anderson Dam. The Anderson Dam Project includes restoration measures downstream because water released from Anderson Reservoir flows into Coyote Creek.


Project Schedule

In 2021, Valley Water broke ground on the Anderson Dam Tunnel Project (ADTP) on the Stage 1 Diversion Outlet at Anderson Dam which will allow for the controlled release of water during a storm or other emergency. The tunnel project is expected to be completed in 2026.

Following completion of the ADTP, Valley Water will begin the seismic retrofit project to almost completely replace the dam in case of a large earthquake. The work includes building new high-level and low-level outlets and removing and rebuilding the spillway and the dam embankment.

Valley Water's Board of Directors certified the Final Environmental Impact Report (EIR) on February 25, 2025. Valley Water anticipates receiving all regulatory permits by spring 2026. The Board authorized the advertisement of the ADSRP Construction Contract to prequalified contractors on September 23, 2025. The contract will be awarded using the Best Value Selection Method in July 2026. The contractor will mobilize to Anderson Dam to begin construction in January 2027. Valley Water expects to complete the work in 2033.

Project timeline

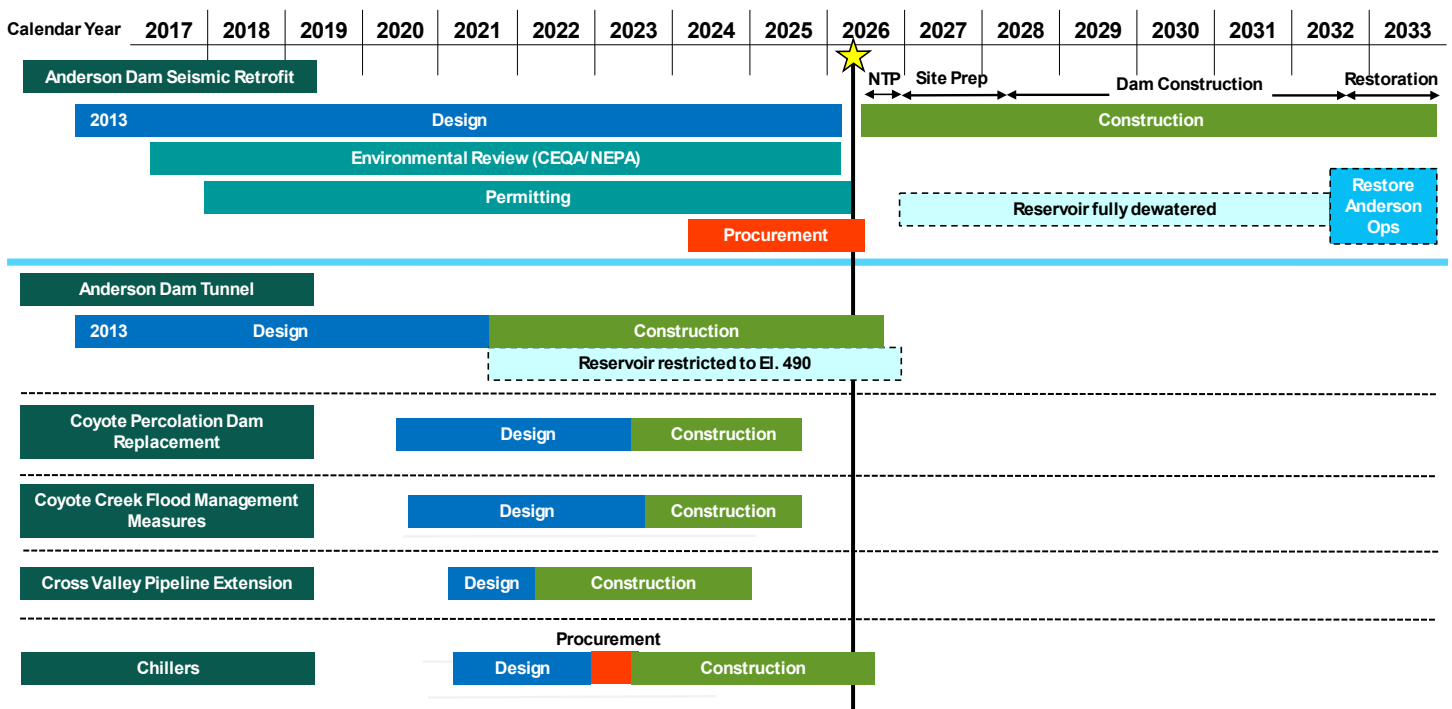

Project Scope

- Near complete replacement of the dam embankment.
- Construction of new higher capacity outlet works.
- Replacement and extension of the concrete spillway and raising the wall height by 7-feet to safely discharge large storm flows.
- Increase the dam crest height by 9-feet to provide more freeboard for larger storm runoff.



ADTP Tunnel Portal

Project Cost & Funding

The construction contract for the Anderson Dam Tunnel Project was awarded for \$161 million in 2021. The total cost for the Anderson Dam Tunnel Project and the Anderson Dam Seismic Retrofit Project is \$2.3 billion. Of the total cost, 15 to 20 percent is utilized for planning, design, construction management, environmental studies, permitting and documentation. The remaining cost is for construction and environmental mitigation. Cost estimates may change as the project progresses.

The renewed Safe, Clean Water and Natural Flood Protection Program, which voters approved in 2020, will contribute up to \$54.1 million to the project. Additionally, the earlier 2012 Safe, Clean Water Program contributed \$14 million to the project.


Anderson Dam Proposed Configuration



About Anderson Dam & Anderson Reservoir

Anderson Dam was built in 1950 and named after Leroy Anderson, the key founder and first president of the Santa Clara Valley Water District. A long, deep natural gorge located three miles east of U.S. 101 in Morgan Hill provided a suitable dam site.

The 235-feet high earthen dam sits along the Coyote Creek Fault on Coyote Road, east of Morgan Hill. Anderson Reservoir lies parallel to the Calaveras Fault. The reservoir holds approximately 90,000 acre-feet of water when full and is currently the largest of the 10 Valley Water reservoirs. It is large enough to fit all nine reservoirs inside its area.

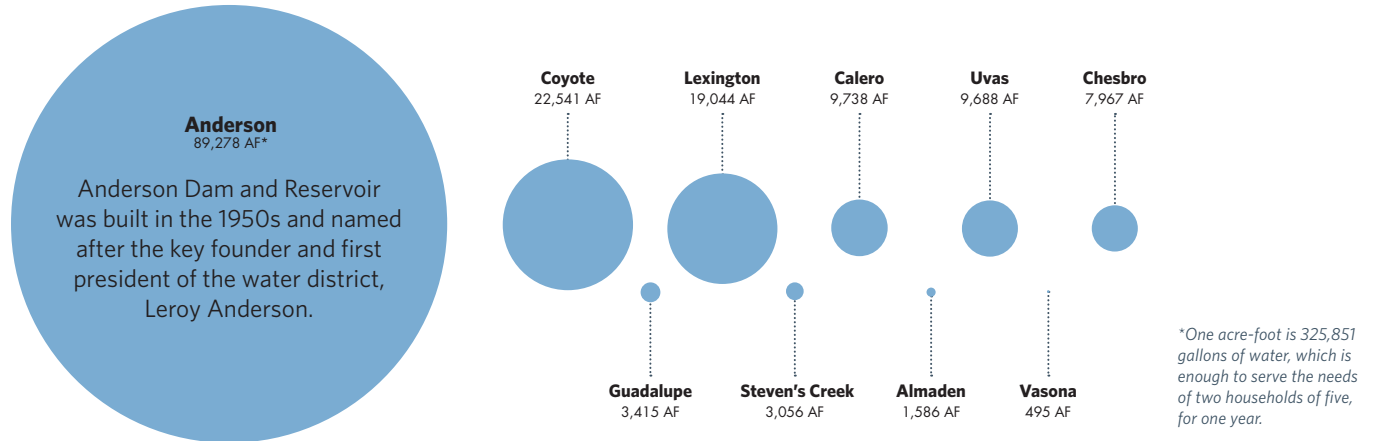

Existing Anderson Dam By the Numbers

1950	192.7	89,278	1,245	7.8	3,320,000	49	10,717
Year it was constructed	Drainage Area (square miles above the dam)	Reservoir capacity (acre feet)	Reservoir surface area when full (acres)	Reservoir Length (miles)	Cubic yards of fill	Outlet pipe diameter (inches)	Average annual yield acre-feet

For other questions, contact Neighborhood Liaison **Jiana Escobar** at jescobar@valleywater.org.

Envíe un correo electrónico a Translations@valleywater.org si tiene preguntas sobre este documento.


Vui lòng liên hệ với Translations@valleywater.org nếu bạn có thắc mắc về tài liệu này.

如果您对此文件有任何疑问, 请联系 Translations@valleywater.org。



CONTACT US

To find out the latest information on Valley Water projects or to submit questions or comments, use our **Access Valley Water** customer request system at access.valleywater.org.



FOLLOW US



scvwd



valleywater



valleywater



Join our mailing list:
<https://delivr.com/2uz9z>

